




RAMPRO //GS 4 MEGABYTE MEMORY EXPANSION

The RAMPRO //GS was made at this stage by manufacturers unknown. It supports 41256 DIP Ram chips in 1,2,3 and 4 Megabyte configurations. The banks are arranged quite counter-intuitively to the silkscreen on the board in the following fashion.

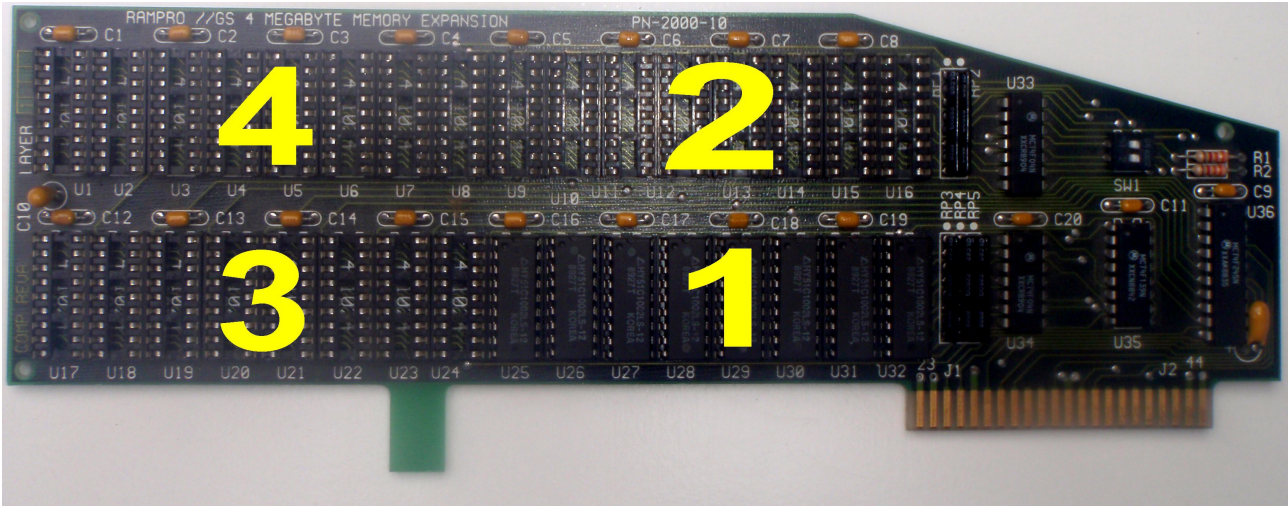


The SW1 switch positions for each sizing are as follows:


Where X is on and - is off

1	2	
x	x	4Mb on board
x	-	3Mb on board
-	x	2Mb on board
-	-	1Mb on board


The following images show 1,2,3 Mb installed and the switches in the correct positions

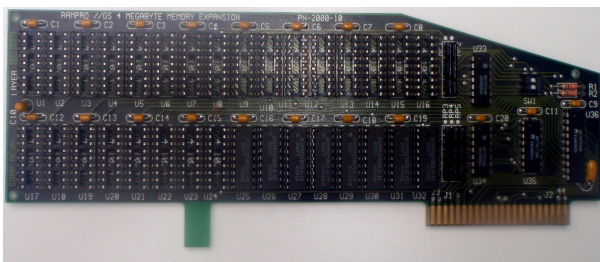

1

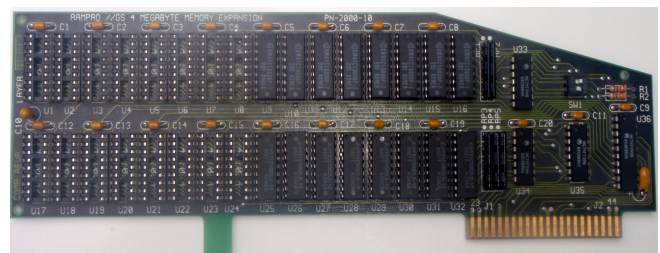

2

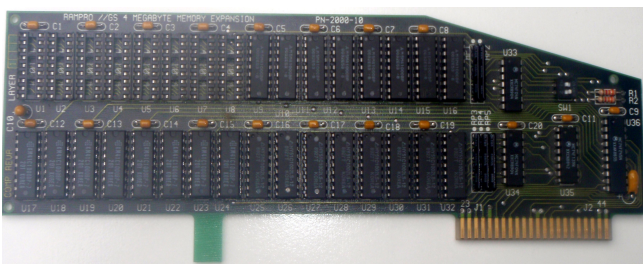

3

Important: Placing ram in the incorrect banks will result in the card reporting incorrect amounts of memory to the system and result in severe system instability.

Personal Note: This appears to have been a fairly common card in Australia. I've seen hmm 5 of these I think, but never seen a manual for one, or had any idea who imported them into the country.