


SYSTEM SAVER™

INSTRUCTIONS

1. Attach SYSTEM SAVER to your Apple II as shown.
2. Disconnect your Apple II power cord. You won't need it anymore.
3. Plug SYSTEM SAVER's short power cord into the back of your Apple II. Plug SYSTEM SAVER's long power cord into your wall outlet. **IMPORTANT:** Leave your Apple power switch permanently on. You'll never use it again.
4. Plug your monitor and printer into SYSTEM SAVER's rear outlets.
5. You're all set! SYSTEM SAVER's front mounted switch now controls your SYSTEM SAVER, Apple II, monitor and printer.

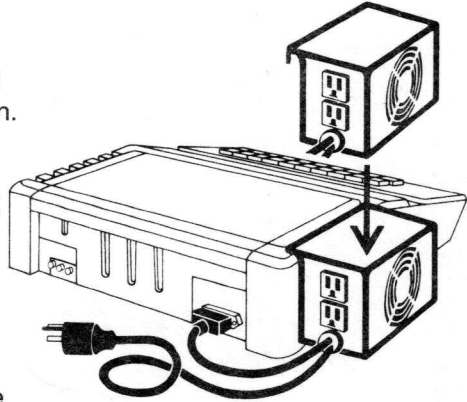

NEED MORE?

See your local dealer or contact Kensington Microware directly for a list of dealers in your area.

Name _____

Address _____

City _____

State _____

Zip _____

Visa# _____

Exp. Date _____


MasterCard# _____

Exp. Date _____

Kensington Microware Ltd.
919 Third Avenue
10th Floor
New York, NY 10022
(212) 486-7707

 **KENSINGTON
MICROWARE**

INSTALLATION OF SPACERS ON 'APPLE RACK' (PART #AP001) FOR MOUNTING 'SYSTEM SAVER'

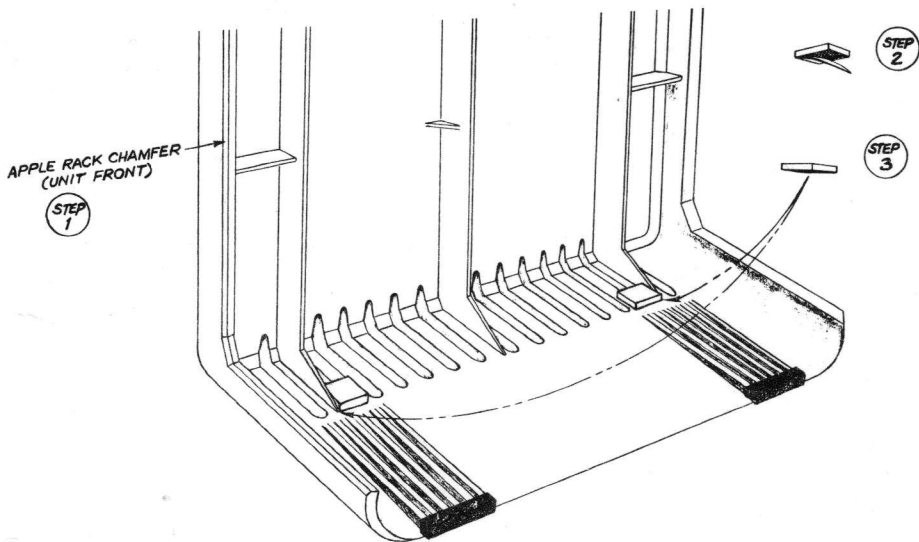

- STEP 1.** POSITION THE 'APPLE RACK' WITH CHAMFER TOWARD FRONT.
- STEP 2.** EXPOSE ADHESIVE BY PEELING PROTECTIVE BACKING FROM SPACER.
- STEP 3.** ALIGN SPACER WITH END OF RIB AND BUTT AGAINST INSIDE SURFACE OF RIB.
- STEP 4.** PRESS SPACER FIRMLY INTO PLACE.